
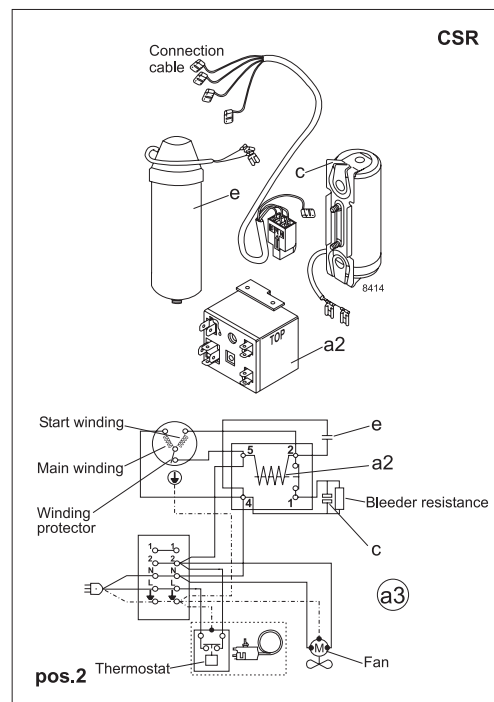


EN 12900 Household (CECOMAF)* 220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W		178	250	331	426	462	540	678	846	976	1050	1293	1582				
Power cons. in W		230	269	307	344	356	381	418	456	481	494	535	576				
Current cons. in A		1.28	1.44	1.60	1.76	1.81	1.92	2.09	2.27	2.38	2.45	2.63	2.8				
COP in W/W		0.77	0.93	1.08	1.24	1.30	1.42	1.62	1.86	2.03	2.12	2.42	2.74				

ASHRAE LBP* 220V, 50Hz, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W		199	279	369	475	516	603	757	946	1091	1174	1447	1772				
Power cons. in W		230	269	307	344	356	381	418	456	481	494	535	576				
Current cons. in A		1.28	1.44	1.60	1.76	1.81	1.92	2.09	2.27	2.38	2.45	2.63	2.8				
COP in W/W		0.86	1.04	1.21	1.38	1.45	1.58	1.81	2.08	2.27	2.37	2.71	3.07				

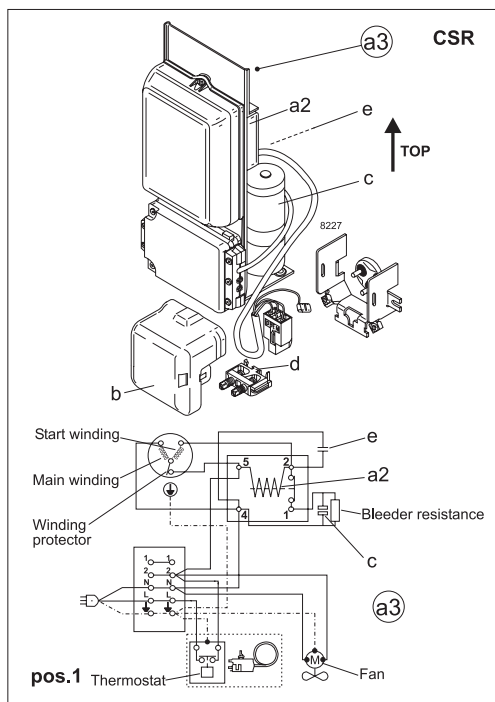

Accessories for	SC12CNX	Figure	Code number
Starting device	550 mm cable length	a3	117-7025
	1000 mm cable length	(pos.1)	117-7014
Starting device (kit)	1500 mm cable length	(pos.2)	117-9719
Starting relay		a2	Components of starting device
Start. capacitor		c	
Run capacitor		e	
Cover		b	
Cord relief		d	103N1004

Test conditions	EN 12900/CECOMAF*	ASHRAE LBP*
Condensing temperature	45°C	45°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	no subcooling	32°C

Mounting accessories	Code number	
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

Nidec GA Compressors accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Nidec GA Compressors reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Nidec Global Appliance Germany GmbH. All rights reserved. www.secop.com